

## When you need it. Where you need it

Chicago Pneumatic has a network that is totally dedicated to the customer. With – Service Franchisees – offices and – people Chicago Pneumatic is fully equipped to meet any and every kind of service requirement from any of its clients. Its 24-hour service offering ensures that there is least waiting time between the service and the customer.



At Chicago Pneumatic, because all our products have been designed, built and developed by us, you can be sure that our build quality and longterm "Cost of ownership" are some of the best around. To find out just how our "Tools" can address some of the issues discussed in this brochure and more, call or write to us at any of the following addresses.



### Chicago Pneumatic

Chicago Pneumatic Sales, 301/302 L.B.S. Marg, Mulund (W), Mumbai 400 080, India  
Tel: +91-22-5640011-21 Fax: +91-22-5683705  
[Division of Atlas Copco (India) Ltd.]  
Visit our websites: [www.chicagopneumatic.com](http://www.chicagopneumatic.com) & [www.cp-india.com](http://www.cp-india.com)

Office	Address	Phone	Fax
Aurangabad	: C/o. Mr. Abhay Naik, Shrikrupa, 5A-N5-M. Sector, CIDCO, Aurangabad - 431 005	0240 - 481568	0240 - 481568
Bangalore	: 1225/11, 34th Cross Road, IV, 'T' Block, Jayanagar, Bangalore - 560 041	080 - 6344513	080 - 6633346
Baroda	: No. 1, Amar Flats, Behind Hotel Express, R.C. Dutt Road, Baroda - 390 005	0265 - 314319	0265 - 341272
Bhubaneswar	: Plot No. 54, Jayadurga Nagar, Bhubaneswar - 751 006	0674 - 575238	0674 - 575238
Chennai	: O.P. Complex, 87, Mount Road, Guindy, Chennai - 600 032	044 - 2343903	044 - 2343011
Cochin	: House No. 227, 13th Cross Road, Giri Nagar, Cochin - 682 020	0484 - 321983	—
Gurgaon	: E-403, Rail Vihar, Sector 15-II, Gurgaon - 122 001	0124 - 6332605	0124 - 6332605
Indore	: 6, Hukum Chand Colony, Panchkuyar Marg, Indore - 452 002	0731 - 414804	0731 - 417422
Jaipur	: H. No. B-108, Vaishali Nagar, Jaipur - 302 021	0141 - 352206	0141 - 352206
Jamshedpur	: Flat No. N2-K5, Muneshwari Bhavan, Contractors' Area, Jamshedpur - 831 001	0657 - 426846	0657-426846
Kolkata	: 30, Jawaharlal Nehru Road, Calcutta - 700 016	033 - 2497771	033 - 2496203
Lucknow	: House No. 2/272, Vikas Khand II, Gomti Nagar, Lucknow - 226 010	0522 - 394021	0522-394021
Mumbai	: 301/302, L.B.S. Marg, P. Box 7761, Mulund (West), Mumbai - 400 080	022 - 5640011	022 - 5646367
New Delhi	: A-57/2, Okhla Industrial Area, Phase-II, New Delhi - 110 020	011 - 6845537	011 - 6841218
Nasik	: CP-Nashik, 90 - MIDC Industrial Area, Satpur, Nasik - 422 007	0253 - 350347	0253 - 350347
Nellore	: Flat No. 212, II Floor, Radhakrishna Towers (R.K. Towers), Near A.C. Stadium, GNT Road, Nellore 524 004	0861 - 320254	0861 - 320254
Panchkula	: House No. 107, Sector 9, Panchkula - 134 113 (Haryana)	0172 - 578262	0172 - 564782
Pune	: Jitendra Image, Ground Floor, 15/8, Karve Road, Opp. IOC Petrol Pump, Erandawane, Pune - 411 004	0212 - 5432105	0212 - 5436009
Rourkela	: Plot No. C2M/161, Near Chinmaya Vidyalaya, 2nd Phase, Chhend Colony, Main Road, Rourkela - 769 015	0661 - 581530	0661 - 580603
Secunderabad	: Plot No. 8, 1st Floor, Sarvasukhi Colony, West Mardded Pally, Secunderabad 500 026	040 - 7801635	040 - 7801637
Udaipur	: Shristi Apartment, Flat No. 7, Plot No. 13 to 18, Near Mahaveer Colony, Bedla Road, Udaipur 313 011	0294 - 452048	0294 - 452048

The recommended air inlet pressure to the tools is 90 psig. The performance parameters specific for all the tools are at 90 psig.  
Since CP is dedicated to a process of on-going improvements, specifications and illustrations given above are subject to change without notice.



## Chicago Pneumatic



Industrial Air Tools

Tools to shape the future

T/P/Rev-5/AR-01/1000/Z-2/Y-9501 111



**Chicago Pneumatic**

Chicago Pneumatic **CP 1100** series high speed Air Hoists are portable & light weight. These hoists have been conceived for a broad range of applications covering fast moving production operations in hazardous environments, applications where space is limited for material handling, production and assembly operations in medium to heavy manufacturing. These hoists are built to stay on the job even under the toughest working conditions.

Welcome to the Chicago Pneumatic Industrial Air Tools Catalogue. Some of the tools presented here are time tested favourites. Others are exciting new breakthroughs. Tools with many decisive advantages which make working with them more effective, ensuring better results. So whether you need to fasten, grind, drill, cut, chip or rivet you will find your CP tool, built to last and easy to use giving you power to shape the future.

The innovator and leader in air tool technology, Chicago Pneumatic is a dedicated group of men and women working together to produce the finest products for customers all over India.

The Company has implemented a manufacturing system that is simple, flexible and customer responsive. The team begins with the research & development department that comes up with ideas for tomorrow's products and improvement on today's models based on the input from the field. In today's competitive and challenging market, CP delivers products with the highest standards of design, ergonomics, quality and performance.

Being a subsidiary of Chicago Pneumatic Tool Company – USA, and a group company of Atlas Copco AB Sweden, gives us access to some of the most advanced technology. It dramatically increases our product offerings, broadens our customer base and enhances our competitive position in the market. To further backup our product offerings, CP has set up the largest network exceeding 25 offices and 85 distributors for parts and services.


Model	Rated capacity kgs	Lifting Hook Speed m/min	Lift (Hook Travel) m	Approx. Weight kgs	Air Inlet Connection	Type of Control
<b>Hoists</b>						
CP-1100-500	500	15.3	4.6	16.8	3/8" NPTF Male swivel	Pull cord
CP-1100-500R	500	15.3	4.6	18.6	3/8" NPTF Male swivel	Pendant
CP-1100-1000	1000	6.4	4.6	22.7	3/8" NPTF Male swivel	Pull cord
CP-1100-1000R	1000	6.4	4.6	24.5	3/8" NPTF Male swivel	Pendant

Introducing the **CP 1200** series extra heavy duty Air Hoists. Durability and dependability were the objectives behind designing these CP "worm drive" hoists. The self-locking worm gear stops load and holds it securely when air flow to motor stops — never requires adjustment. Ideal for lifting raw or processed materials in steel manufacturing plants, heavy assemblies in automobile, truck, tractor factories, aircraft, heavy machinery manufacture petrochemical plants & food processing operation.

Model	Rated capacity kgs	Lifting Hook Speed m/min	Lift (Hook Travel) m	Approx. Weight kgs	Air Inlet Connection	Type of Control
<b>Hoists</b>						
CP-1200-VANHED	227	12.8	4.6	27.3	1/2" NPTF	Pull chord
CP-1200-VANHAB	227	12.8	4.6	28.6	1/2" NPTF	Pendant
CP-1200-MANHED	455	6.1	4.6	27.3	1/2" NPTF	Pull chord
CP-1200-MANHAB	455	6.1	4.6	28.6	1/2" NPTF	Pendant
CP-1200-TANHED	909	3.7	4.6	27.3	1/2" NPTF	Pull chord
CP-1200-TANHAB	909	3.7	4.6	28.6	1/2" NPTF	Pendant
CP-1200-FUNFED	1818	1.5	4.6	49.5	1/2" NPTF	Pull chord
CP-1200-FUNFAB	1818	1.5	4.6	50.9	1/2" NPTF	Pendant

Standard Equipment : Latch hooks, built-in lubricators and air strainer, exhaust muffler.

Note : a) Lifting hook speed is at rated capacity. b) For Accessories refer Chicago Pneumatic Accessories for Hammers, Air Hoist and Sanders Catalog

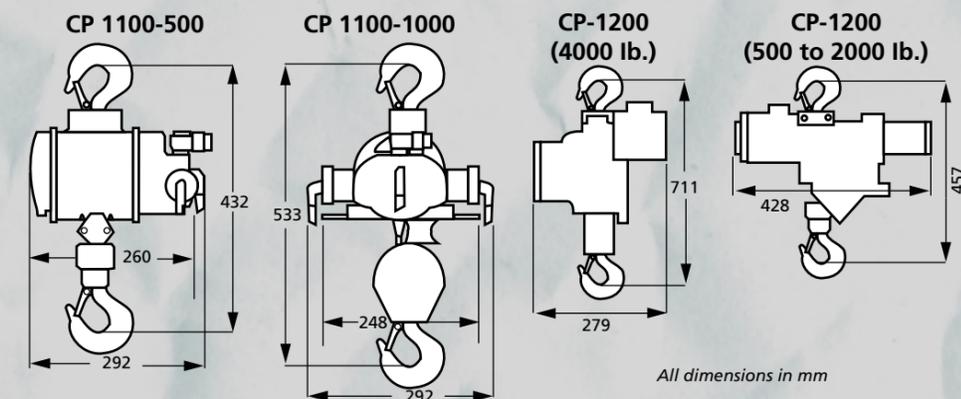

Model	Riveting Capacity (Cold)		Blows per minute	Approx. Weight kg	Overall Length mm	Air Inlet Connection	Standard Equipment
	Dural mm	Steel mm					
<b>Aero Riveter</b>							
CP-4X(O)	8	5	1900	1.7	219	Rc 1/2"	Coil spring retainer and air regulator

Model	Riveting Capacity in Steel (hot) mm	Blows per minute	Approx. Weight kg	Overall Length mm	Air Inlet Connection	Type of handle	Standard Equipment
CP-4689-PUBAR	20	1500	7.6	430	Rc 1/2"	Pistol grip	Snap clip retainer
CP-4689-PUDAR	24	1320	8.6	470	Rc 1/2"	Pistol grip	Snap clip retainer
CP-4689-PUGAR	30	1200	9.4	523	Rc 1/2"	Pistol grip	Snap clip retainer

Model	Rivet Cutting Capacity in Steel mm	Blows per minute	Approx. Weight kg	Overall Length mm	Air Inlet Connection	Type of handle	Standard Equipment
CP-4181-PULER	27	720	15	660	Rc 1/2"	Pistol grip	Chisel retainer 2 Nos. rubber bumpers

Model	Blows per minute	Stroke mm	Approx. Weight kg	Overall Length mm	Air Inlet Connection	Type of handle
CP-4123-PYBE	2820	25.4	5.5	308	Rc 1/2"	Pistol grip
CP-4123-PYRE	2400	50.8	5.9	327	Rc 1/2"	Pistol grip
CP-4123-PYSE	1920	76.2	6.5	378	Rc 1/2"	Pistol grip

Model	Blows per minute	Approx. Weight kg	Overall Length mm	Air Inlet Connection	Type of handle
CP-455L	4200	2	257	Rc 1/2"	Straight

Model	Blows per minute	Approx. Weight kg	Overall Length mm	Air Inlet Connection	Type of handle	Standard Equipment
CP-455LNS	4200	3.1	450	Rc 1/2"	Straight	One set of 19 hardened alloy steel needles, ø 5 mm

Model	Blows per minute	Approx. Weight kg	Overall Length mm	Air Inlet Connection	Type of handle	Standard Equipment
CP-4711-LYRA	850	4.2	457	Rc 1/4"	Straight	63.5 mm dia. rubber butt
CP-4003-LYRA	800	10.9	1156	Rc 3/8"	Straight	63.5 mm dia. rubber butt

For accessories refer Chicago Pneumatic Accessories for Hammers, Air Hoist and Sanders catalog

### Chicago Pneumatic Sales

Division of Atlas Copco (India) Ltd.

301/302 L.B.S. Marg, Mulund (W), Mumbai 400 080. Tel: 564 0011/21 Fax: 564 3705

#### Offices

- Aurangabad : 0240-481568 ● Bangalore : 080-6344513 ● Baroda : 0265-314319 ● Bhubaneshwar : 0674-575238
- Chennai : 044-2343903 ● Cochin : 0484-321983 ● Gurgaon : 0124-6332605 ● Indore : 0731-414804
- Jaipur : 0141-352206 ● Jamshedpur : 0657-426846 ● Kolkata : 033-2497771 ● Lucknow : 0522-394021 ● Mumbai : 022-5640011
- New Delhi : 011-6845537 ● Nasik : 0253-350347 ● Nellore : 0861-320254 ● Panchkula : 0172-578262 ● Pune : 0212-5432105
- Rourkela : 0661-581530 ● Secunderabad : 040-7801635 ● Udaipur : 0294-452048

Since CP is dedicated to a process of on-going improvements, specifications and illustrations given above are subject to change without notice.



**Chicago Pneumatic**

Chicago Pneumatic offers the widest selection of grinders and sanders to cater to a variety of applications from die contouring and repair to heavy duty grinding/sanding. Featuring powerful yet compact and lightweight ergonomic designs, that enable you to get the work done quicker with less fatigue. Every tool is built with the highest quality materials to ensure your CP tool will go the *extra mile*.




CP-9107-N



CP-3050



CP-3140-B

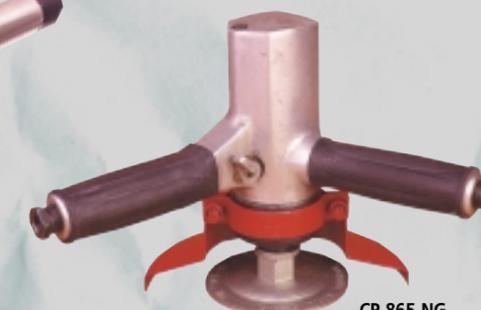

CP-865-NG



CP-319-A

### Features

CP Grinders have all the advantages of **advanced ergonomics**... with the features required to enhance the physical and mental well-being of operators need to achieve increased productivity levels.

- **High power motor** — maintains high speed under load
- **Heat treated internal parts** — for longer life & lower maintenance costs
- **Rugged construction** — to withstand tough use
- **Easy to service**

Model	Free Speed rpm	Spindle Thread Size	Collet Capacity mm	Wheel Capacity ø x width mm	Approx. Weight kgs	Overall Length mm	Outside dia. mm	Air Inlet
<b>Die Grinders</b>								
CP-9107 <sup>1)</sup>	35000	—	6	—	0.45	124	35	Rc 1/4"
CP-3050N-21000 <sup>2)</sup>	21000	M10	6	40 x 20	2.5	317	51	Rc 3/8"
CP-3050N-18000 <sup>2)</sup>	18000	M10	6	50 x 20	2.5	317	51	Rc 3/8"
CP-3050N-15000 <sup>2)</sup>	15000	M10	6	56 x 20	2.5	317	51	Rc 3/8"
CP-3050N-12000 <sup>2)</sup>	12000	M10	6	76 x 20	2.5	317	51	Rc 3/8"
CP-3050N-8000 <sup>2)</sup>	8000	M10	6	76 x 20	2.5	317	51	Rc 3/8"

<sup>1)</sup> Standard equipment : 6mm Collet Stock Code D 7608 501

Optional equipment : 1/4" Collet Stock Code D 7602 511

<sup>2)</sup> Standard equipment : 6mm Collet Stock Code Z 9568 520

Optional equipment : 1/4" Collet Stock Code Z 9579 520

Note : a) While ordering CP-3050, please specify, whether you need wheel or collet. Unless specified 21000 & 18000 rpm are supplied with 6mm collet and 15000, 12000 and 8000 rpm are supplied with the wheel guards. b) Mounted point or grinding wheel is not in the standard scope of supply.

Model	Free Speed rpm	Spindle Thread Size	Wheel Capacity ø x width mm	Approx. Weight kgs	Overall Length mm	Outside dia. mm	Air Inlet
<b>Heavy Duty Grinders</b>							
CP-3140-B-6000	6000	M16	150 x 25	5.2	535	89	Rc 1/2"
CP-3220-S-5800	5800	M16	150 x 25	6.8	603	89	Rc 1/2"
CP-3220-S-3500	3500	M16	200 x 25	7.7	603	89	Rc 1/2"

Note : Tools are supplied with guard but mounted point / grinding wheel is not in the standard scope of supply.

\* Collet Capacity

Model	Free Speed rpm	Spindle Thread Size	Wheel Capacity ø mm	Approx. Weight kgs	Overall Length mm	Air Inlet
<b>Vertical Sanders &amp; Grinders</b>						
CP-865-Sander/Polisher	2500	M16	180	2.8	190	Rc 1/4"
CP-865-NS Sander	5000	M16	180 Coated Disc	2.8	190	Rc 1/4"
CP-865-NG Grinder	5000	M16	180 DCD	3.2	190	Rc 1/4"
CP-319AS-6000 Sander	6000	M16	180 Coated Disc	5.4	178	Rc 1/2"
CP-319A-6000 Grinder	6000	M16	150 Resinoid Cup	5.4	178	Rc 1/2"
CP-319A-6000 DCD Grinder	6000	M16	230 DCD	5.4	178	Rc 1/2"

Note : Grinding wheel / Sanding pad / Polisher is not in the standard scope of supply.



**Chicago Pneumatic**

Chicago Pneumatic offers one of the most comprehensive range of hammers available today. They are powerful and versatile – most suited for chipping, riveting and rivet cutting. CP rammers ensure more uniform sand compaction in the mould increasing productivity in foundries. So whether you need to rivet or chip, cut or clean, you will find the tool you need in CP's power packed range.



### Features

CP Hammers have all the advantages of advanced ergonomics... with the features required to enhance the physical and mental well-being operators need to achieve increased productivity levels.

- Air powered — flow of air through tool keeps air hammers cool to the touch; won't overheat
- Rugged construction — withstands tough use
- Heat treated internal parts — for longer life & lower maintenance costs

### Chicago Pneumatic Sales

Division of Atlas Copco (India) Ltd.

301/302 L.B.S. Marg, Mulund (W), Mumbai 400 080. Tel: 564 0011/21 Fax: 564 3705

#### Offices

- Aurangabad : 0240-481568 ● Bangalore : 080-6344513 ● Baroda : 0265-314319 ● Bhubaneswar : 0674-575238
- Chennai : 044-2343903 ● Cochin : 0484-321983 ● Gurgaon : 0124-6332605 ● Indore : 0731-414804
- Jaipur : 0141-352206 ● Jamshedpur : 0657-426846 ● Kolkata : 033-2497771 ● Lucknow : 0522-394021 ● Mumbai : 022-5640011
- New Delhi : 011-6845537 ● Nasik : 0253-350347 ● Nellore : 0861-320254 ● Panchkula : 0172-578262 ● Pune : 0212-5432105
- Rourkela : 0661-581530 ● Secunderabad : 040-7801635 ● Udaipur : 0294-452048

Since CP is dedicated to a process of on-going improvements, specifications and illustrations given above are subject to change without notice.

T/P/GRINDERS/REV-1/APR-012000Z-2N-950111

Model	Type of handle	Drilling Capacity in steel mm	Free Speed rpm	Approx. Weight kgs	Overall Length mm	Air inlet
<b>Drills</b>						
CP-303-ML-3000 <sup>1)</sup>	Pistol	6	3000	1.14	235	Rc 1/4"
CP-303-N-3000 <sup>1)</sup>	Pistol	6	3000	1.25	178	Rc 1/4"
CP-3075-0-1500 <sup>2)</sup>	Pistol	10	1500	2.8	282	Rc 1/4"
CP-3075-0-1000 <sup>2)</sup>	Pistol	13	1000	2.9	295	Rc 1/4"

<sup>1)</sup> Standard equipment : Chuck & Key

<sup>2)</sup> Standard equipment : Chuck & Key, side handle

Model	Type	Drilling Capacity in steel mm	Free Speed rpm	Spindle offset mm	Approx. Weight kgs	Overall Length mm	Air inlet
<b>Heavy Duty Drills</b>							
CP-0315-SUFAL	Non-reversible	14.3	750	34.9	6.6	391	Rc 1/2"
CP-0315-SUFUL	Non-reversible	22.2	350	34.9	6.6	410	Rc 1/2"
CP-0315-RAFAL	Reversible	14.3	750	34.9	7.7	410	Rc 1/2"
CP-0315-RAFUL	Reversible	22.2	350	34.9	7.7	410	Rc 1/2"
CP-3270-SUFEL	Non-reversible	25.4	450	41.3	12.5	371	Rc 1/2"
CP-3270-RAFEL	Reversible	25.4	450	41.3	14.1	371	Rc 1/2"
CP-3270-RAFYL	Reversible	31.8	350	41.3	14.1	371	Rc 1/2"
CP-3270-TAFYL	Reversible	38.1	150	41.3	16.6	406	Rc 1/2"
CP-3270-FR-100	Reversible	38.1	150	41.3	18.1	442	Rc 1/2"
CP-3270-FR-55	Reversible	38.1	130	41.3	18.1	442	Rc 1/2"

Standard Equipment : Feed screw, dead handle, self closing roll throttle.

Optional equipment at no extra cost : Spade handle in place of feed screw can be supplied.

In such models, letter "F" is replaced by letter "G" e.g. CP-0315-SUGAL.



**Chicago Pneumatic**

Chicago Pneumatic offers the finest selection of Impact Wrenches available today. The CP heavy duty Impact Wrenches are popular everywhere right from motor vehicle assembly shops to general maintenance in power plants and steel plants.

Each wrench is expertly designed to withstand tough use and feature CP proven clutches which give you the long lasting durability you expect from CP.

Model	Capacity Bolt Size mm	Spindle Square Drive inch	Torque Nm	Approx. Weight kgs	Overall Length mm	Side to Center mm	Air Inlet
<b>Impact Wrenches</b>							
CP-606-RS	19	3/4	888	5.4	235	47	Rc 1/4"
CP-610-RP	32	1	1835	9.6	362	60	Rc 1/2"
CP-610-RP6	32	1	1835	11.2	514	60	Rc 1/2"

For accessories refer the Chicago Pneumatic Impact Sockets & other Impact Wrench Accessories catalog.



CP-606-RS



CP-610-RP6

### Features

CP Impact Wrenches have all the advantages of advanced ergonomics... with the features required to enhance the physical and mental well-being operators need to achieve increased productivity levels.

- Bolt capacity range (13 mm to 32 mm) — to handle most threaded fastener applications
- Superfast rundown – Achieves torque level quickly, ideally suited for soft or hard pull up condition
- High power-to-weight ratio — low weight/small package with high torque output
- Heat treated internal parts — for longer life and lower maintenance costs.

### Chicago Pneumatic Sales

Division of Atlas Copco (India) Ltd.

301/302 L.B.S. Marg, Mulund (W), Mumbai 400 080. Tel: 564 0011/21 Fax: 564 3705

#### Offices

- Aurangabad : 0240-481568 ● Bangalore : 080-6344513 ● Baroda : 0265-314319 ● Bhubaneshwar : 0674-575238
- Chennai : 044-2343903 ● Cochin : 0484-321983 ● Gurgaon : 0124-6332605 ● Indore : 0731-414804
- Jaipur : 0141-352206 ● Jamshedpur : 0657-426846 ● Kolkata : 033-2497771 ● Lucknow : 0522-394021 ● Mumbai : 022-5640011
- New Delhi : 011-6845537 ● Nasik : 0253-350347 ● Nellore : 0861-320254 ● Panchkula : 0172-578262 ● Pune : 0212-5432105
- Rourkela : 0661-581530 ● Secunderabad : 040-7801635 ● Udaipur : 0294-452048

Since CP is dedicated to a process of on-going improvements, specifications and illustrations given above are subject to change without notice.

TPI/DRILLS/REV-1/APR-01/2000/Z-ZY-950111

Precision, reliability & easy handling best characterise Chicago Pneumatic Industrial Air Screwdrivers. The combination of Desoutter (U.K.) technology and Chicago Pneumatic's manufacturing expertise give you the ultimate in screwdriving.

### Features

- High precision fastening – simultaneous drive disengagement / air shut-off with **TARGET TORK** clutch
- Powerful, efficient air motor – Fast cycle times with low air consumption
- No wasted air – 2D89A models run only when pressed onto fastener and stop when torque has been achieved
- Less vibration – Less shut-off reaction – No ratchet dwell at the end of fastening reaction
- High reverse torque – For speedy fastener removal
- Cleaner assembly – Oil free exhaust with **dryline** lubrication-free motor

Model – rpm	Type of handle	Capacity mm	Torque kg – cm	Drive size	Length mm	Dia. mm	Weight kgs	Air inlet BSP
<b>Reversible Air Screwdrivers – Torque Control Target – Tork Clutch Range</b>								
2D89-AX-2300	Straight	5	36	1/4" hex	256	36	1.0	1/4"
2D89-AX-1450	Straight	5	48	1/4" hex	274	36	1.0	1/4"
2D89-AX-1100	Straight	6	77	1/4" hex	274	36	1.0	1/4"
2D89-AX-550	Straight	6	91	1/4" hex	274	42	1.1	1/4"
2D89-PX-1450	Pistol	5	46	1/4" hex	240	42	1.17	1/4"
2D89-PX-900	Pistol	6	71	1/4" hex	240	42	1.17	1/4"
2D89-PX-500	Pistol	8	107	1/4" hex	240	42	1.17	1/4"

Model – rpm	Type of handle	Capacity mm	Torque kg – cm	Drive size	Length mm	Dia. mm	Weight kgs	Air inlet BSP
<b>Reversible Air Screwdrivers – Spring Tension Clutch Range</b>								
2D8-AX-2300	Straight	5	62	1/4" hex	226	36	0.9	1/4"
2D8-AX-1450	Straight	5	68	1/4" hex	244	36	1.0	1/4"
2D8-AX-1100	Straight	6	80	1/4" hex	244	36	1.1	1/4"
2D8-AX-550	Straight	6	80	1/4" hex	244	36	1.0	1/4"
2D8-PX-1450	Pistol	6	77	1/4" hex	211	40	1.1	1/4"
2D8-PX-900	Pistol	6	80	1/4" hex	211	40	1.1	1/4"
2D8-PX-500	Pistol	8	100	1/4" hex	211	40	1.1	1/4"

For Accessories refer Chicago Pneumatic Bits & other Screwdriver Accessories catalog.

Introducing Chicago Pneumatic Impact Screwdrivers featuring the Rocking dog clutch for fast rundown of free running fasteners. Best suited for torque requirements above 100 kg-cm.

Model	Type of handle	Drive Size	Capacity mm	Working Torque Range kg-cm	Ult. Torque @ 90 PSI kg-cm	Weight kg	Length mm	Air Inlet NPTF
<b>Impact Screwdriver</b>								
CP-721-QC	Pistol	1/4" Hex	10	68 – 700	1000	0.5	146	1/4"
CP-722-QC	Straight	1/4" Hex	10	68 – 700	1000	0.9	146	1/4"

For Accessories refer Impact Sockets & other Impact Wrench Accessories catalog.



### Chicago Pneumatic Sales

Division of Atlas Copco (India) Ltd.

301/302 L.B.S. Marg, Mulund (W), Mumbai 400 080. Tel: 564 0011/21 Fax: 564 3705

#### Offices

- Aurangabad : 0240-481568 ● Bangalore : 080-6344513 ● Baroda : 0265-314319 ● Bhubaneswar : 0674-575238
- Chennai : 044-2343903 ● Cochin : 0484-321983 ● Gurgaon : 0124-6332605 ● Indore : 0731-414804
- Jaipur : 0141-352206 ● Jamshedpur : 0657-426846 ● Kolkata : 033-2497771 ● Lucknow : 0522-394021 ● Mumbai : 022-5640011
- New Delhi : 011-6845537 ● Nasik : 0253-350347 ● Nellore : 0861-320254 ● Panchkula : 0172-578262 ● Pune : 0212-5432105
- Rourkela : 0661-581530 ● Secunderabad : 040-7801635 ● Udaipur : 0294-452048

Since CP is dedicated to a process of on-going improvements, specifications and illustrations given above are subject to change without notice.



**Chicago Pneumatic**

Chicago Pneumatic offers a wide selection of quality drills for drilling, tapping, honing or reaming in metal / wood. All have been designed with application in the foreground — high speeds for small diameter, high motor power for larger diameter drilling applications. All models are lightweight and compact for easy handling. Each tool features speed control for fast breakthrough with less chances of burning or damaging bits. With a reputation for superior durability, the Chicago Pneumatic drill team is hard to beat.



### Features

CP Drills have all the advantages of **advanced ergonomics**... with the features required to enhance the physical and mental well-being operators need to achieve increased productivity levels.

- CP Power Vane air motor — provides maximum power and minimum weight, tool never gets hot
- Governor control on CP-0315 and larger drills — conserves air at light loads and holds speed at heavier loads
- Heat treated internal parts — for longer life & lower maintenance costs
- Rugged construction — withstands tough use.